

Hemming Feet

Use the Hemming Foot for easily adding a finishing touch the edges of your project(s).

There are several types of hemming feet to use depending on the type and weight of fabric you are sewing on and the look you want to achieve:


The **2mm or 3mm Shell Rolled Hem Foot** has a very narrow tunnel on the underside allowing you to stitch a rolled hem in sheer and very lightweight fabrics for evening wear, lingerie, scarves, etc. Used with a zig zag stitch you can accomplish a beautiful scalloped edge.

The **2mm or 5mm Narrow Hem Foot** has a slightly wider and flatter tunnel on the underside allowing you to stitch a narrow hem in medium weight fabrics. Suitable for napkin edges, curtains, ruffles.

The **10mm Hemmer** is a separate attachment that is used with your standard “A” sewing foot. It allows you to roll a 10mm double hem in light to medium weight fabrics.


Hem anything: What's your idea?

- Bottoms of dresses, blouses, and edges of sleeves, flounces, evening wear, and lingerie.
- Hems and edges of curtains, valences, tiebacks, and ruffles.
- Edges of napkins, scarves, bows.
- Use your machines decorative stitches to make your hem extra special.

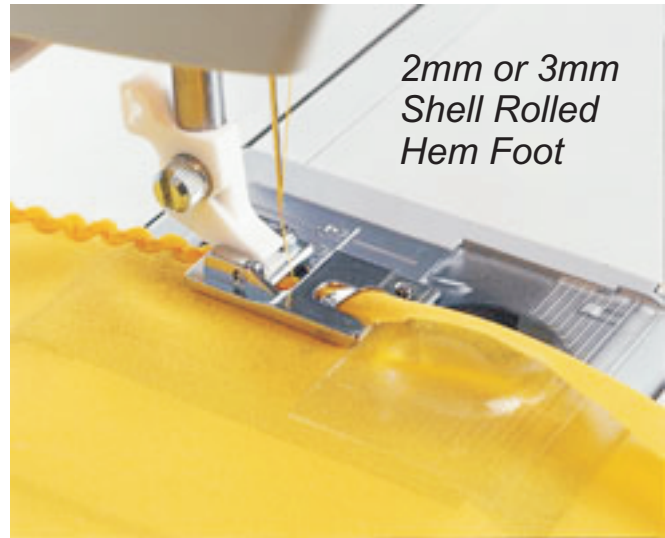


Continued on next page...

Shelled Rolled Hem on Light Weight Fabrics:

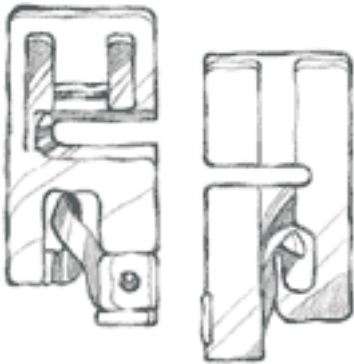


- 1. Snap on either the 2 mm or 3mm Shell Rolled Hem Foot.
- 2. Press a rolled hem (the width of the tunnel on the underside of the foot) in the first inch of the hem.
- 3. Place the hem under the presser foot and stitch several stitches along the edge of the hem.
- 4. Stop with the needle in the fabric, raise the presser foot and pull the fabric edge up into the scroll/guide on the foot.
- 5. Lower the presser foot, continue to sew. Do not help the fabric edge to roll, simply hold it vertically.

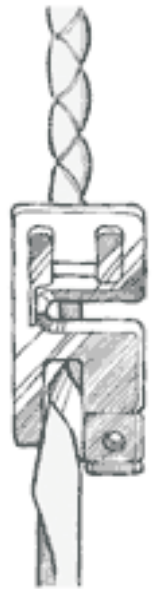


Stitch a shell rolled hem on lightweight fabrics for lingerie, chiffon, scarves. Zigzag stitch, length between 3 to 4.5, width between 3 to 4 (increase upper tension slightly so the edge will scallop, if desired).

Narrow Rolled Hem on Medium Weight Fabrics:

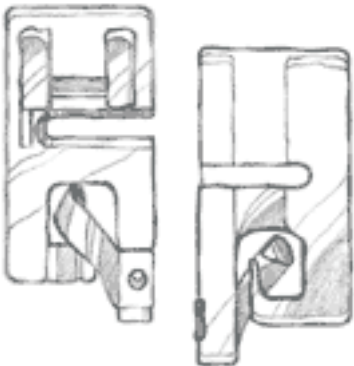


- Snap on either the 2mm or 5mm Narrow Hem Foot
- Stitch a narrow hem in very lightweight fabrics such as silk scarves, batiste napkins, shirt hems, ruffles and lingerie.
- Straight stitch, length 2. Snap on Narrow Hem Foot.
- 1. Press a double hem (the width of the tunnel on the underside of the foot) in the first inch of the hem.
- 2. Place under the presser foot and stitch several stitches along the edge of the hem. 3. Stop with the needle in the fabric, raise the presser foot and pull the fabric edge up into the scroll/guide on the foot.

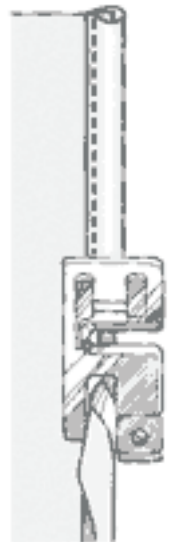

Lower the presser foot, continue to sew. Do not help the fabric edge to roll, simply hold it vertically.

Straight stitch, length 2.5 to 3 (Can be used with decorative stitches).

10mm Hemmer on Light to Medium Weight Fabrics:

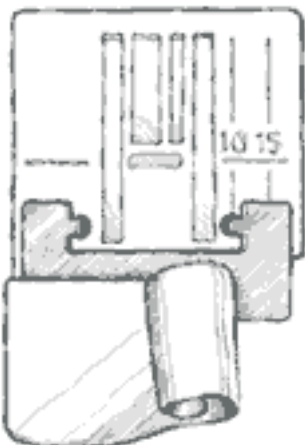

1. Snap 10 mm Hemmer onto needle plate of machine.
 2. Place fabric into the scroll/guide of the 10 mm Hemmer, rolling it up to the needle.
 3. Sew.
- Do not help the fabric roll. Simply guide it.